

products III

- Algae Control
- Ammonia
- Calibration
- Chlorine
- Conductivity
- Cooling Tower Monitoring
- Dissolved Oxygen
- Interface Level
- Nitrate/Nitrite
- Odour FOG Control
- pH/ORP
- Self Cleaning Filters
- Sludge Blanket Level
- SRT Control
- Suspended Solids
- TOC/COD
- Turbidity

Royce Water Technologies P/L
ABN 21 110 057 399

Queensland
Ph 0428 571 234
Fax (07) 3857 1236

NSW
Ph 0408 079 073
Fax (02) 9629 7472

Victoria
Ph 0439 337 247
Fax. (03) 9886 3025

www.roycewater.com.au

III pH, ORP, Conductivity & Flow Transmitter

MULTI-PARAMETER Two Wire Transmitter

SHARKTX Universal Mount
NEMA 4X Enclosure
4-20 Loop
+ 24 VDC Power



SHARKTXP Panel Mount and
DIN Rail Mount
NEMA 4X
Front Panel
4-20 Loop
+ 24 VDC Power



Summary

Complete and versatile, SHARKTX is the only 1/4 DIN and DIN rail mountable two wire transmitter on the market that allows the user to select one of four measuring parameters.

Four Measuring Parameters

Select the parameter you wish to measure from the easy-to-use LCD menu on the front cover. Choose Conductivity, pH, ORP or Flow.

Complete: No Extra Cards / Options Required

Each SHARK comes complete. There are no extra costs associated with buying boards for different applications.

Two Mounting Options

SHARKTX comes complete with a universal mounting kit for surface, panel and pipe-mount applications. The NEMA 4X 1/4 DIN enclosure is perfect for stand-alone or panel-mount operation. SHARKTXP is NEMA 4X for front panel mounting and comes complete with DIN rail mounting hardware for mounting in a control panel.

Display

2-line, 16-character LCD on the front panel.

Analog Output

SHARK provides one isolated, independent, and fully scalable 4-20 mA output.

Enclosure

SHARKTX is packaged in a rugged NEMA 4X polycarbonate enclosure making it ideally suited for heavy-duty applications such as industrial wastewater neutralization, municipal water and wastewater, pulp and paper, and process control. The SHARKTXP enclosure is also polycarbonate with a NEMA 4X front panel, and DIN rail mounting hardware on the back.

/// MULTI-PARAMETER Two Wire Transmitter - Technical Data

	pH	ORP	Conductivity	Flow
Display	2 x 16 alpha-numeric LCD display			
Power Requirements	4 to 20mA, Loop Powered, 16 to 32 VDC			
Measuring Range	pH: 0.01 to 14.00 Temp: 0 to 100°C or 32° to +212°F	ORP: -1999 to +1999mV Temp: 0 to 100°C or 32° to +212°F	uS/cm: 0 to 2,000, 0 to 20,00, 0 to 200.0, 0 to 2000 mS/cm: 0 to 20.00, 0 to 200.0 MΩ/cm: 0 to 19.99 Temp: 0 to 100°C or 32° to +212°F	Flow: 0 to 9999 with select. flow rate units Volume: 0 to 999 with Auto Range Flow rate units: Gallons (GP), Cubic Feet (CF), Liters (LP), Cubic Meters (CM), custom by entering factor related to Gallons Time units: Seconds (S), Minutes (M), Hours (H)
Temperature Compensation	Automatic or Manual 0 to 100°C (32° to +212°F)	Not required	Automatic or Manual User selectable temperature compensation slope 0.0 to 10.0%/°C. 0 to 100°C (32° to +212°F)	Not required
Temperature Unit	°C or °F			Not required
Temperature Sensor	User selectable: 300Ω NTC Thermistor, 3000Ω NTC Thermistor or Pt. 1000 RTD			
Calibration Modes	Auto-Calibration Manual Calibration Temperature Calibration	Manual Calibration Temperature Calibration	Dry Calibration Sample Calibration Temperature Calibration	K factor Input
Ambient Conditions	Temperature: -20°C to +60°C or -4°F to +140°F Humidity: 0 to 90% RH (non-condensing)			
Menu Access Front Panel	Auto-Calibration, Manual Calibration Temperature Display	Manual-Calibration, Temperature Display	Manual Calibration Temperature Display	Not available
Menu Access Inside	Full Access to all parameters of operations menu			
Sensor to Transmitter Distance	Differential Sensor: 3000 ft Combination Sensor: 10 ft		300 ft	2000 ft
Analog Outputs	4 to 20mA Channel 1 Isolated Output, Range expand 0 - 100% of full scale (min segment 10% of full scale), max. load 800Ω			
Memory Back-up	All user settings are retained indefinitely in memory (EEPROM)			
Mechanical	SHARKTX Enclosure: NEMA 4X, 1/4 DIN, polycarbonate enclosure with two 1/2" conduit holes SHARKTXP Enclosure: NEMA 4X front panel, 1/4 DIN, polycarbonate SHARKTX Mounting: Universal Mounting kit for surface, pipe and panel mount included SHARKTXP Mounting: Panel and DIN rail mount included			
Sensor Input	Probe: -600 to +600mV Temp. Sensor: 0 to 9999Ω	Probe: -1999 to +1999mV Temp. Sensor: 0 to 9999Ω	Cell: 0 to 9999Ω Temp. Sensor: 0 to 9999Ω	Paddle: 0 to 2000Hz
Invalid Entries	Invalid entries cannot be stored			
Manual Test Mode	Process value can be simulated with arrow keys to verify correct setup of output			
Output Hold	4 to 20mA output is placed on hold when the transmitter is in Menu mode			
Calibration Data	Recall data from last calibration, calibration mode, 1st & 2nd accepted buffer value and probe mV output, calibration temperature, calibration slope, and probe efficiency		Recall data from last calibration, calibration buffer accepted value, and cell resistance, calibration temperature	Recall store K factor.
Auto Return	User selectable auto return if the transmitter is left in menu mode for more than 10 min.			
Display Damping	User can select rate at which the transmitter updates display. Enables display damping of unstable process			
Net Weight	SHARKTX: 0.71 lbs (0.32 kg), SHARKTXP: 0.25 lbs (0.12 kg)			
Approvals	ULC (pending)			


Ordering Information:

SHARKTX Universal Mounting
SHARKTXP Panel and DIN Rail Mounting




/// MULTI-PARAMETER Two Wire Transmitter - Dimensions Inches (mm)

SHARKTX

Universal Mount, NEMA 4X Enclosure, 4-20 Loop + 24 VDC Power

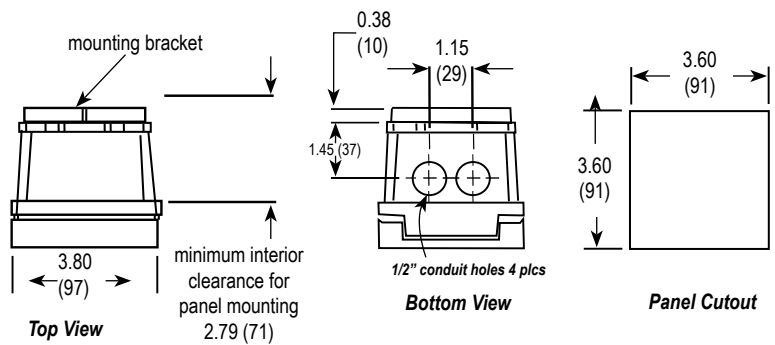


Mounting Configurations

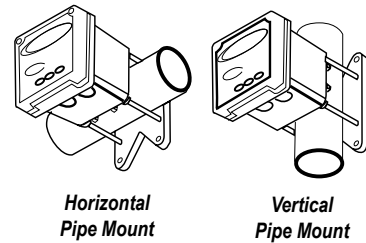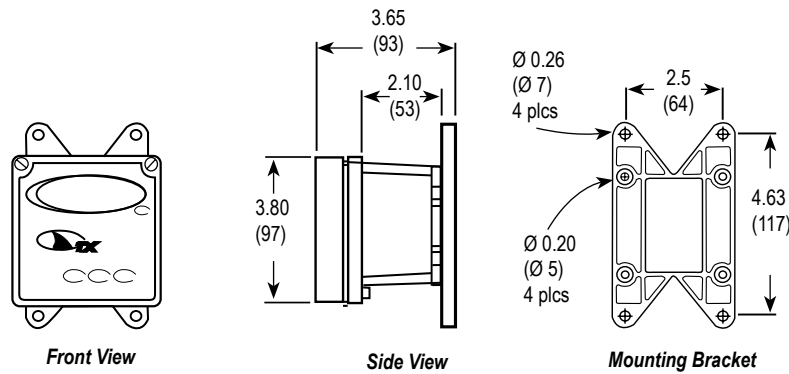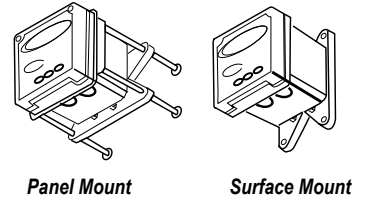

SHARKTXP

Panel Mount and DIN Rail Mount, NEMA 4X Front Panel, 4-20 Loop + 24 VDC Power

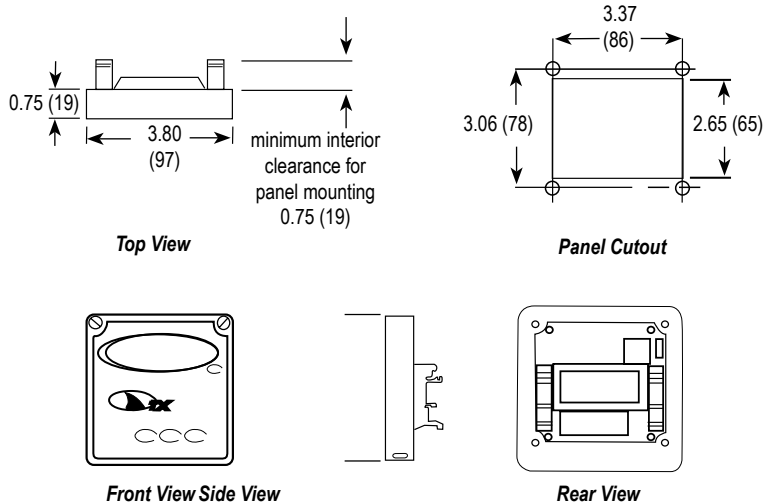

Mounting Configurations

